

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number  
**WO 2005/016108 A1**

- (51) International Patent Classification<sup>7</sup>: **A47L 9/16**, B04C 5/12
- (21) International Application Number: **PCT/GB2004/003414**
- (22) International Filing Date: **9 August 2004 (09.08.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
0318939.6 13 August 2003 (13.08.2003) **GB**
- (71) Applicant (for all designated States except US): **DYSON TECHNOLOGY LIMITED** [GB/GB]; Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **FRENCH, Timothy, Alexander** [GB/GB]; 4 Stockwell Road, Devizes Wiltshire SN10 2DP (GB). **GOMICIAGA-PEREDA, Ricardo** [GB/GB]; Wynyard Flat, Baskerville, Malmesbury Wiltshire SN16 9BS (GB). **RERRIE, John, Paul** [GB/GB]; 5 Niebull Close, Malmesbury Wiltshire SN16 9TX (GB). **STOKES, Andrew, Philli** [GB/GB]; 42 James Close, Chippenham Wiltshire SN15 3YA (GB).
- (74) Agents: **SMITH, Gillian, Ruth et al.**; Intellectual Property Department, Dyson Limited, Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CYCLONIC SEPARATING APPARATUS

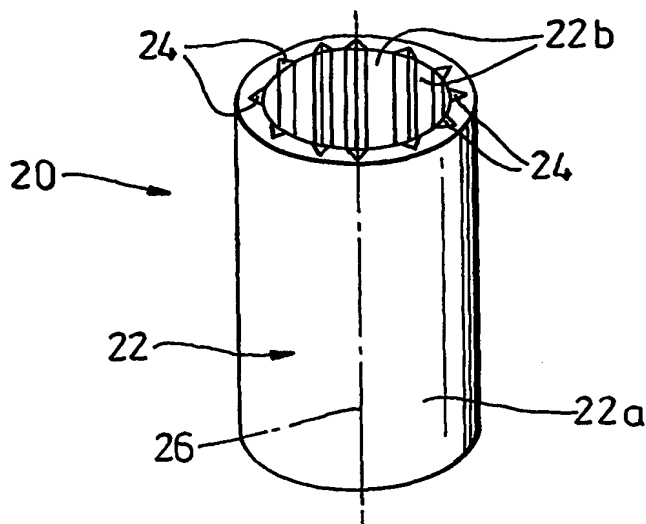

(57) Abstract: The invention provides cyclonic separating apparatus (10) for separating solid material from a fluid, the apparatus having a separating chamber (12), an inlet (14) communicating with the separating chamber (12) for carrying the fluid with the solid matter entrained therein to the separating chamber (12), and an outlet (20; 120; 220; 320; 420; 520; 620) for carrying the fluid away from the separating chamber after the solid material has been separated therefrom. The outlet (20; 120; 220; 320; 420; 520; 620) is formed by a conduit communicating with the interior of the separating chamber (12) and having a longitudinal axis (26; 126; 226; 326). A plurality of grooves (24; 124; 224; 324; 424; 524; 624) are formed in an interior surface (22b; 122b; 222b; 322b; 422b; 522b; 622b) of the conduit outlet (20; 120; 220; 320; 420; 520; 620), the grooves (24; 124; 224; 324; 424; 524; 624) extending in the same direction as the longitudinal axis (26; 126; 226; 326). The presence of the grooves (24; 124; 224; 324; 424; 524; 624) in the outlet has the effect of reducing noise generated by the apparatus (10) when in use and also improves pressure recovery.

WO 2005/016108 A1